

1. 安装前轮

Step1: Install the front wheel

请先将长隔套套进螺丝（图 1），放入轮胎,对准孔位将螺丝穿过，再把短隔套放入(靠近碟刹盘一侧)，并放入螺帽拧紧（图 2）

Frist insert the long spacer into the screw(picture 1), then put the tire and insert the short spacer (near the side of the disc brake),put the nuts and tighten screws(Picture 2)



①



②

2. 安装碟刹

Step2 :Install the brake disc

把碟刹装在车轮上的碟刹盘，对准孔位放入螺丝并拧紧

Install the brake caliper on the disc brake,align the screw holes and tighten screws



③

3. 安装前挡泥板

Step3: Install the front fender

请先将前挡泥板两侧的小挡泥板安装在主挡泥板上（图 4 红色标记），放入螺帽并拧紧（共 4 个孔位）。再将组装好的挡泥板的孔位对准，放入螺丝拧紧（图 4 黄色标记）

First Install 2pcs small fenders on the main fender (marked in red on picture 4), put nuts and tighten screws (4 holes). Then align the screw holes of the fender with the screw holes of the front fork and tighten screws (marked in yellow on picture 4).



④




⑤

4. 前后转向灯螺丝

4. Front and rear turn signal screws

转向灯的螺丝是松动的，骑行前请拧紧。

The screws of the turn signal is loose, please tighten it before riding.

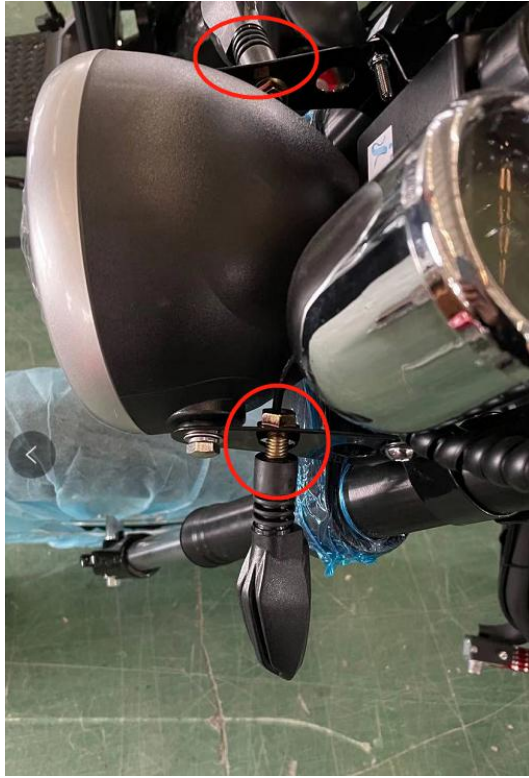

⑥



⑦